Technicolor

TECHNICAL DATA

DECO-TILE

TECHNICOLOR **TECHNICAL FEATURES**

STANDARD	FEATURES	VALUE REQUIRED	TECHNICOLOR
ISO 10545/2	SIZE		
	length and width	± 0,6 % / ± 2 mm	± 0,6 % / ± 2 mm
	thickness	± 5 % ± 0,5 mm	± 5 % ± 0,5 mm
	straigthness of sides	± 0,5 % ± 1,5 mm	± 0,5 % ± 1,5 mm
	wedging	± 0,5 % ± 2 mm	± 0,5 % ± 2 mm
	flatness	± 0,5 % ± 2 mm	± 0,5 % ± 2 mm
ISO 10545/3	water absorption	≤ 0,5 %	0,3 %
ASTM C373	water absorption	≤ 0,5 %	meets the standards
ISO 10545/9	thermal shock	no visible alteration	resistant
ASTM C484	thermal shock	unaffected	unaffected
ISO 10545/12	frost/freeze resistance	no visible alteration	resistant
ASTM C1026	frost/freeze resistance	unaffected	unaffected
ISO 10545/13	chemical resistance	no visible alteration	resistant
ASTM C650	chemical resistance		unaffected
ISO 10545/4	breaking strength	≥ 35 N/ mm²	40 N/ mm²
ISO 10545/7	visible abrasion resistance		PEI IV
ASTM C1027	visible abrasion resistance	CLASS I-V	CLASS IV
ISO 10545/14	stain resistance	≥ CLASSE 3	5
ASTM C1378	stain resistance	≥ CLASSE 3	5
DIN EN 16165	anti-slip		R10
DCOF	dynamic coefficient of friction	› 0,42	0,50
ANSI A137.1	aesthetic classes	V0-V4	V1

TECHNICOLOR **INSTALLATION PATTERNS**

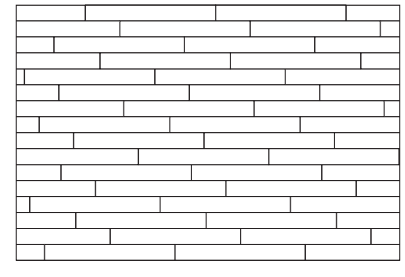

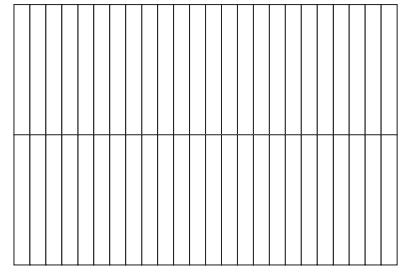

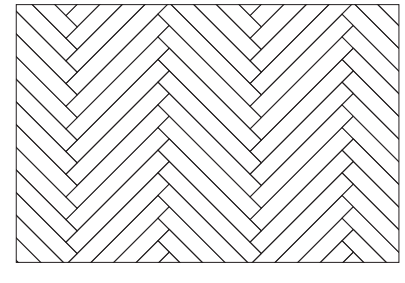

RECOMMENDED GROUT JOINT IS A MINIMUM OF 3MM.

·IRREGULAR SHADING

·CALIBER DIFFERENCES WITHIN THE SAME BOX

·DIFFERENT EDGES THAT FOLLOW THE TYPICAL IMPERFECTIONS OF THE WOOD

·DIFFERENT STRUCTURES

DECO-TILE

DECO-TILE

STAY CONNECTED
-
www.decotile.com
@decotile

Locations

Toronto
Head Office + Warehouse

143 Tycos Dr.
Toronto, ON M6B 1W6
416 413 7985

Oakville
Showroom

550 Speers Rd. Unit #2
Oakville, ON L6K 2G3
905 582 7985